

Technical Data Sheet

Version 3.0
Valid up to August 2012



Prodex® AP10

REFLECTIVE THERMAL INSULATION PRODEX®
AP= ALUMINUM + POLYESTER

10 mm (1/2 inch) closed cell polyethylene foam sandwiched between pure aluminum on one side and white polyester film on the other



Reflective thermal insulation developed according to the highest standards of quality, designed to save energy eliminating the radiant heat emitted by roofs within the constructions. Besides, it protects your home, business or project providing COMFORT at any time of year.

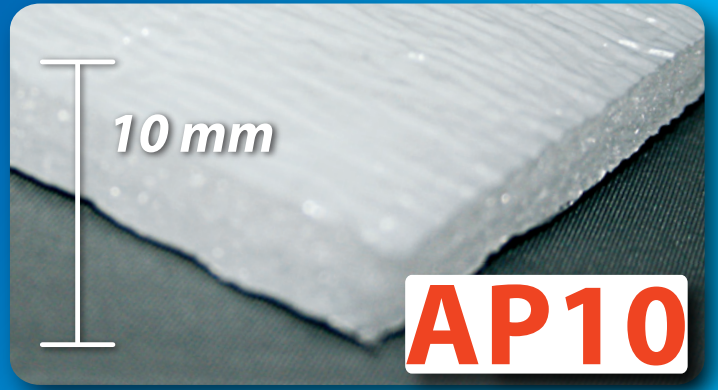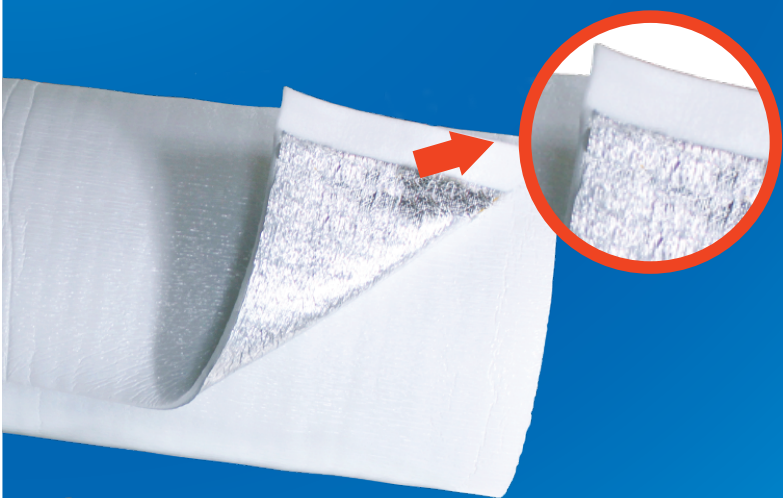

With a 2" grade of 5 mm. thick space in the edge of the insulation roll to facilitate and improve the overlap between each piece.

TECHNICAL SPECIFICATIONS – PRODEX THERMIC / AP10

AP10 INSULATION (an aluminium foil one side polyester foil the other side)		
MEASURES AND TOLERANCES OF THE STANDARD PRODUCT		
THICKNESS: 0.4 ± 0.027 (in)	LARGO: ± 11 in	WIDTH: 4 ± 0.032 (ft)
TECHNICAL CHARACTERISTICS OF THE PRODUCT		
CHARACTERISTICS	VALUE	STANDARD
FOAM CELL STRUCTURE	Closed	-
EFFECTIVE WIDTH	4 ft	-
AVERAGE WEIGHT OF ft²	0,076 lb/ft²	-
WATER RESISTANCE	Waterproof	Dir. UEAtc
WATER VAPOR TRANSMISSION	0.05 perms (gr/ft²*h*in.hg)	ASTM E 96/IRAM 1735
EMITANCE	0,03	ASTM C-1371-98
FUNGI RESISTANCE	No growth	ASTM C 1338
CORROSIVENESS	Pass	ASTM C-1224
PLIABILITY	No cracking	ASTM C-1224
BLEEDING AND DELAMINATION	No bleeding no delamination	ASTM C-1224
HUMIDITY RESISTANCE	Pass	ASTM C-1258
OPERATING TEMPERATURE	-4 °f / 176 °f	ASTM C-1224



It is recommended a distance of 2.20 meters to 3.50 meters between supports.
Do not install at soffits when the insulation can be permanently exposed to UV radiation.

